

Technical Datasheet

SQ-58

Portable Emergency Shower and Eyewash Station



Use good quality stainless steel 304
Self pressurized. Applied in area without fixed water source.
Easy to move and relocated
Combination both emergency shower and eye wash function
Surface powder coated

Specifications

TECHNICAL DATA


SHOWER OPERATION	Hand lever
EYE/FACE WASH OPERATION	Push Handle
WATER INLET/AIR INLET CONNECTION SIZE	3/4"
FLOW AT OPERATING PRESSURE	Eye/Face wash ≥ 5 litres/minute; Shower ≥ 15 L/minute
WORKING CONDITION	Water source temperature: 15-35°C, air temperature 15-38°C
SAFETY VALVE/SELF DRAINING VALVE/WATER LEVEL INDICATOR	Avaliable
WORKING PRESSURE; DESIGN PRESSURE	0.2 to 0.4MPa; 0.6MPa
TANK VOLUME	160L(120L water; 40L air)

MATERIALS OF CONSTRUCTION

PIPE/TANK/HOLDING FRAME/HANDRAIL	SS304
SHOWER VALVE/SHOWER HEAD/EYEWASH VALVE/ELBOW	SS304
WATER LEVEL INDICATOR	Stainless steel+glass
WHEELS	Rubber+SS304
EYEWASH NOZZLE	ABS(with flip top dust cover)

WEIGHTS AND DIMENSIONS

ASSEMBLE DIMENSIONS (WxDxH)	950mm x 700mm x 2350mm
NET WEIGHTS	90kg

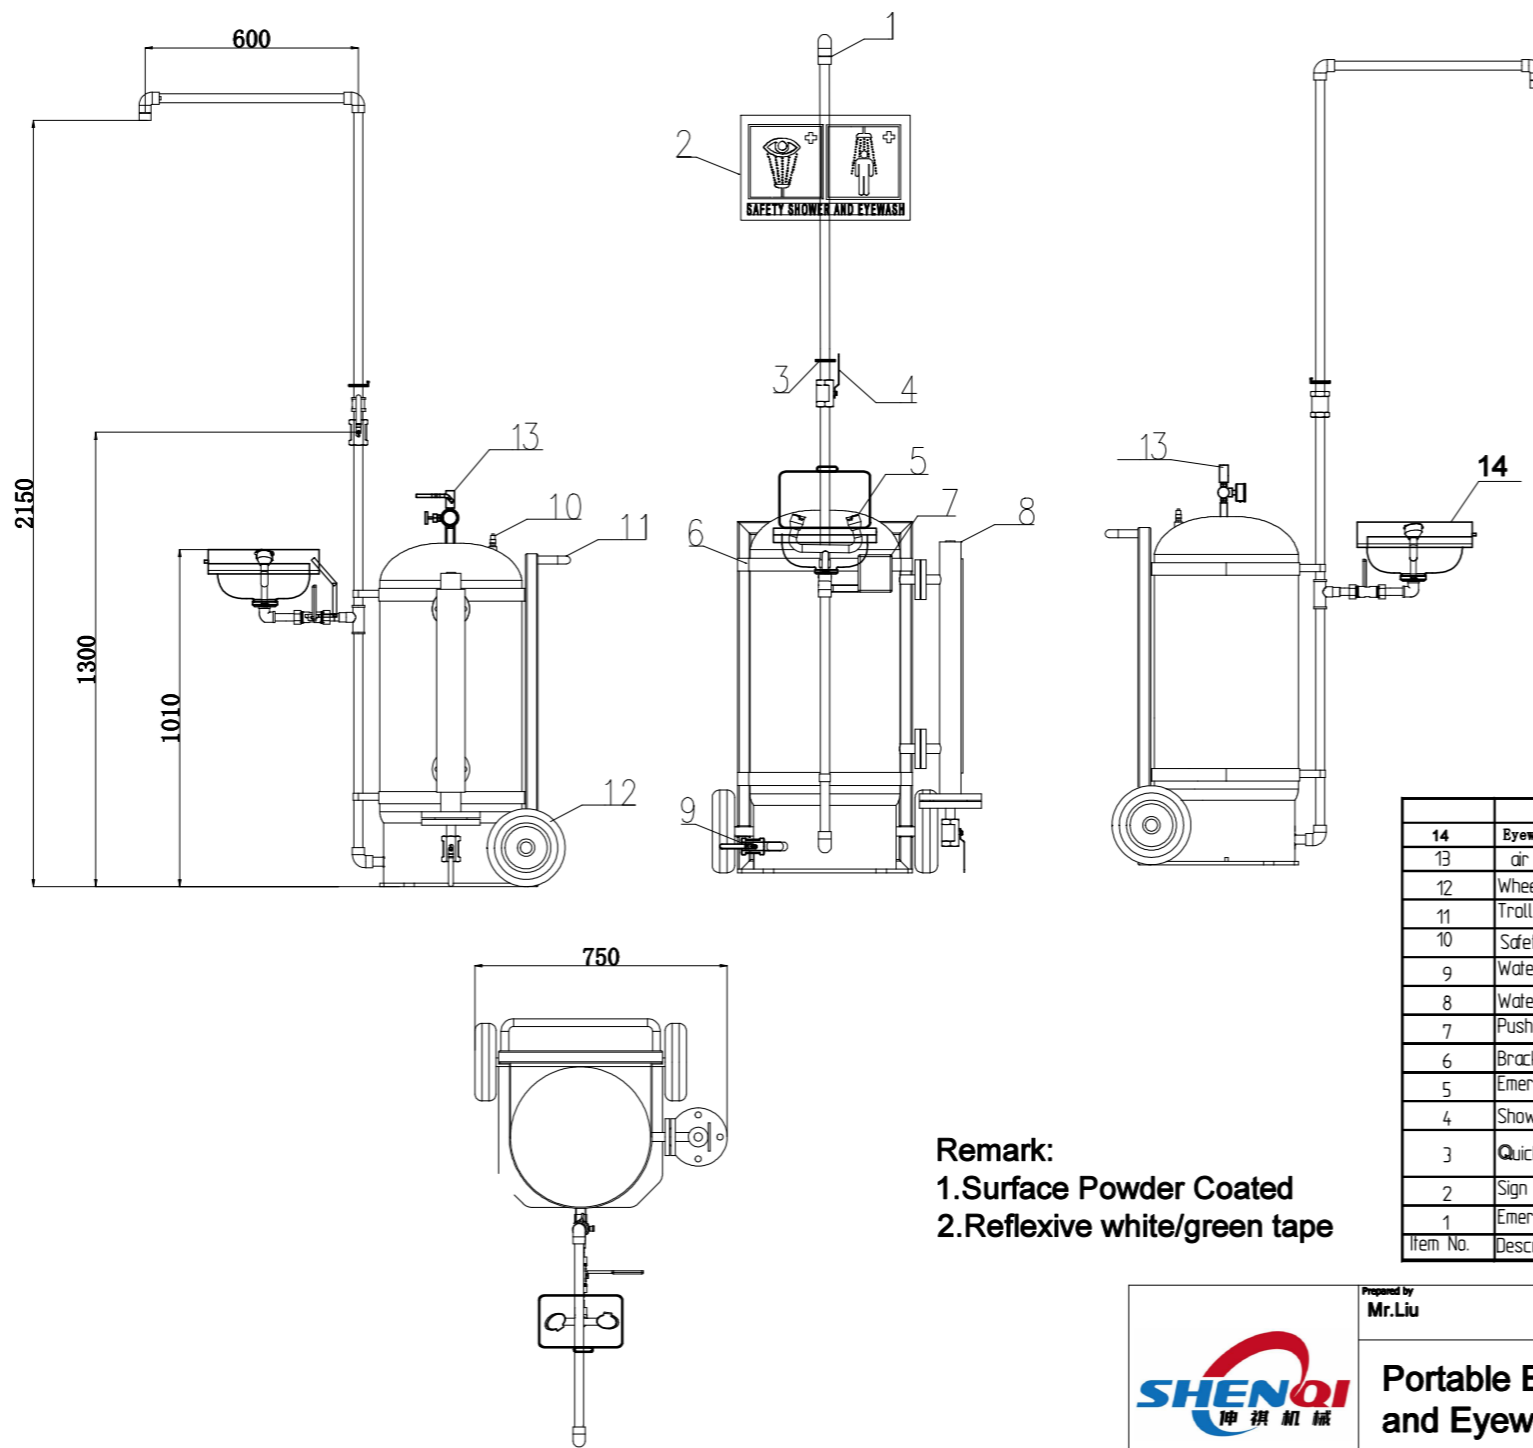

Remark:
1.Surface Powder Coated
2.Reflexive white/green tape

Item No.	Description	Remark.
14	Eyewash cover lid & bowl	
13	air inlet	
12	Wheel	*2
11	Trolley handrail	
10	Safety valve	brass
9	Water Inlet	
8	Water level indicator	
7	Push handle for eyewash	
6	Bracket	
5	Emergency eyewash assembly	
4	Shower valve & control lever	
3	Quick connection	disassemble during shipment
2	Sign board	
1	Emergency shower	

Prepared by Mr.Liu	Approved by	Date 15-August-2023	Scale 1:20	
Portable Emergency Shower and Eyewash				
Drawing No. 23SQ-08PS-0815-0001				
Rev. No.0			Sheet 1 (1)	