





Volume	External Size(mm)			Internal Size(mm)			Weight(kg)	Floor Layer (removable & adjustable)
	H	L	D	H	L	D		
2 Gallon(7.5L)	330	330	330	250	250	250	8	0
4 Gallon(15L)	560	430	430	410	350	350	15	1
12 Gallon(45L)	890	590	460	740	510	380	25	1
15 Gallon(57L)	1120	590	460	970	510	380	30	1
22 Gallon(83L)	1650	590	460	1500	510	380	51	2
30 Gallon(114L)	1120	1090	460	970	1010	380	56	1
45 Gallon(170L)	1650	1090	460	1500	1010	380	87	2
60 Gallon(227L)	1650	860	860	1500	780	780	106	2
90 Gallon(340L)	1650	1090	860	1500	1010	780	120	2
110 Gallon(416L)	1650	1500	860	1500	1420	780	185	2



Red Color - flammable material	Yellow Color - combustible material	Blue Color- Corrosive materia
such as inks, paints, and coating dyes etc	Alcohol, glue, gasoline, crude oil, nitrocellulose, Thinner, clean Naphtha,etc	Hydrochloric acid, nitric acid, carbonic acid, hydrogen peroxide, bleach,etc
 38mm Double Ex-proof Layer  Galvanized Floor Adjustable & Removabe  Good quality cold rolled steel Strong load bearing  50mm Depth Anti-Leak Notch 50mm CAUTION 3 HANDS UNDER CABINET LIFTING OR REL OCATING		

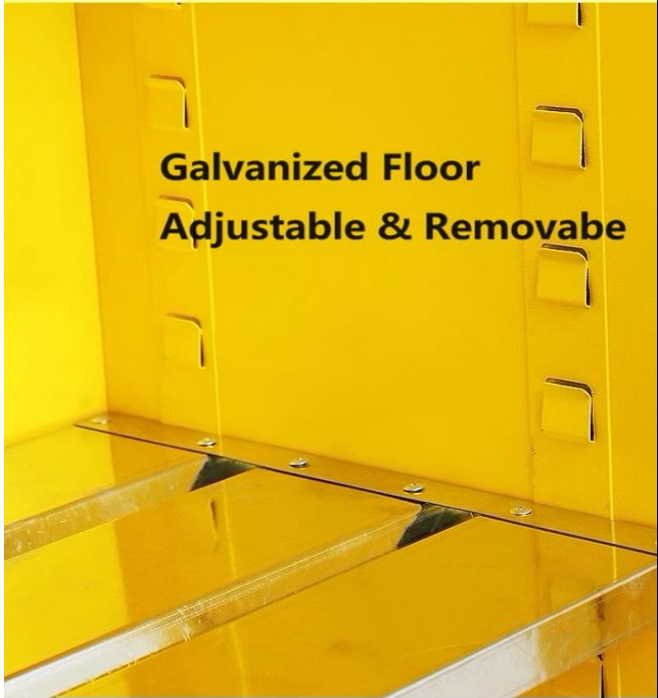

Electrostatic Prevention Design

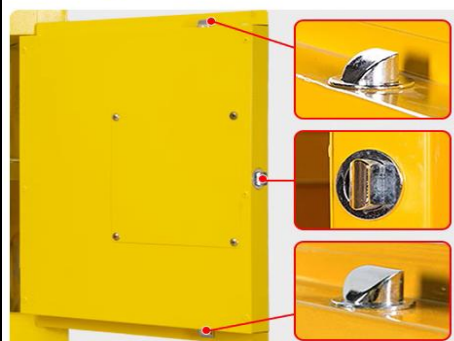


3 Point Linkage

—
top
middle
bottom



Adjustable Ventilation
on both side

Reinforced Hinge
1.5mm thickness



Wide Application



Lab



Hospital



School



Factory